


**Two-Component No-Drip Mix and Dispense Valve for Pourable Materials**



- ▶ 2200-545-037 No-Drip Dual-Ball and Seats for low viscosity - pourable materials
- ▶ Point of application mix and dispense valve
- ▶ No-Flush™ Twist Lock disposable static mixers minimize waste and maintenance
- ▶ Readily mounts with 2-screws and accurately fix-positioned using 2-dowel pins
- ▶ Double air operated (air to open / air to close) insures immediate start and stop
- ▶ Stainless Steel wetted metal components
- ▶ Model option
  - ✓ Handles for manual operation

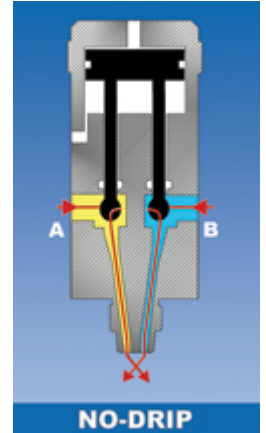

**Precise, efficient, and cost-effective:** three great reasons why the **2200-545-037** automatic mix/dispense valves are tough to beat. These valves provide complete control over the application of metered two component adhesives or sealants - either automatically or manually. Arguably, they are the best 'point of application' dispense valves available.

**Responsive**



The short stroke length and double air operation of the valve combine to produce an immediate start or stop to the dispense cycle making it ideal for automated applications.

**Durable Design**

With wear resistant seals and hardened components, the valve's service life is enhanced - a distinct advantage for high volume, repetitive operations or when using filled or abrasive materials.

The unrestrictive internal design allows for the free flow of even high viscosity materials, while insuring that the two material components remain separate until they enter the **No-Flush™** mixer/nozzle.

# 2200-545-037 No-Drip® Valve

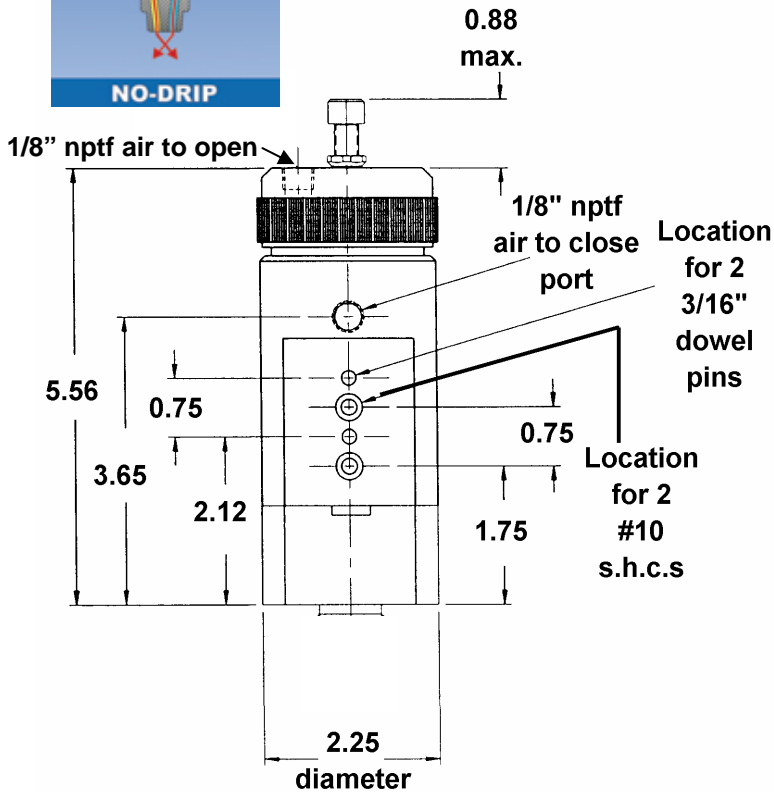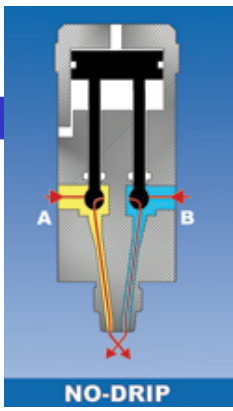

## Valve Specifications

Dry Weight: ~ 5 lbs.

Max. Inlet Pressure: 3,500 P.S.I.

Construction: carbon steel (standard)  
stainless steel (optional)

Inlet ports: 1/4" N.P.T.F.

Mounting: (2) - #10 s.h.c.s. drill thru

Alignment: (2) - #16 dowel holes

Operation: double air operated;  
air to open, air to close

## Mixer Specifications

Many twist lock mixer selections are available

A typical size as shown below:

(17) static mix elements

0.118" Inside Diameter

2.45" Long



**Bayonet-Style, Twist-Lock disposable static mixer.**

Image is enlarged to show detail.



**Handles are available for manual applications; shrouds and mixers come in various I.D.'s and number of mix elements.**

Form 2200-545-037 Rev A



Manufacturers of Precision Dispense Systems & Valves

45677 Helm Street • P.O. Box 701460  
Plymouth, MI 48170 • USA  
Phone: (734) 459-8600 Fax: (734) 459-8686  
[www.SealantEquipment.com](http://www.SealantEquipment.com)  
Email: [valves@sealantequipment.com](mailto:valves@sealantequipment.com)